




Traditional Bandpass Filters

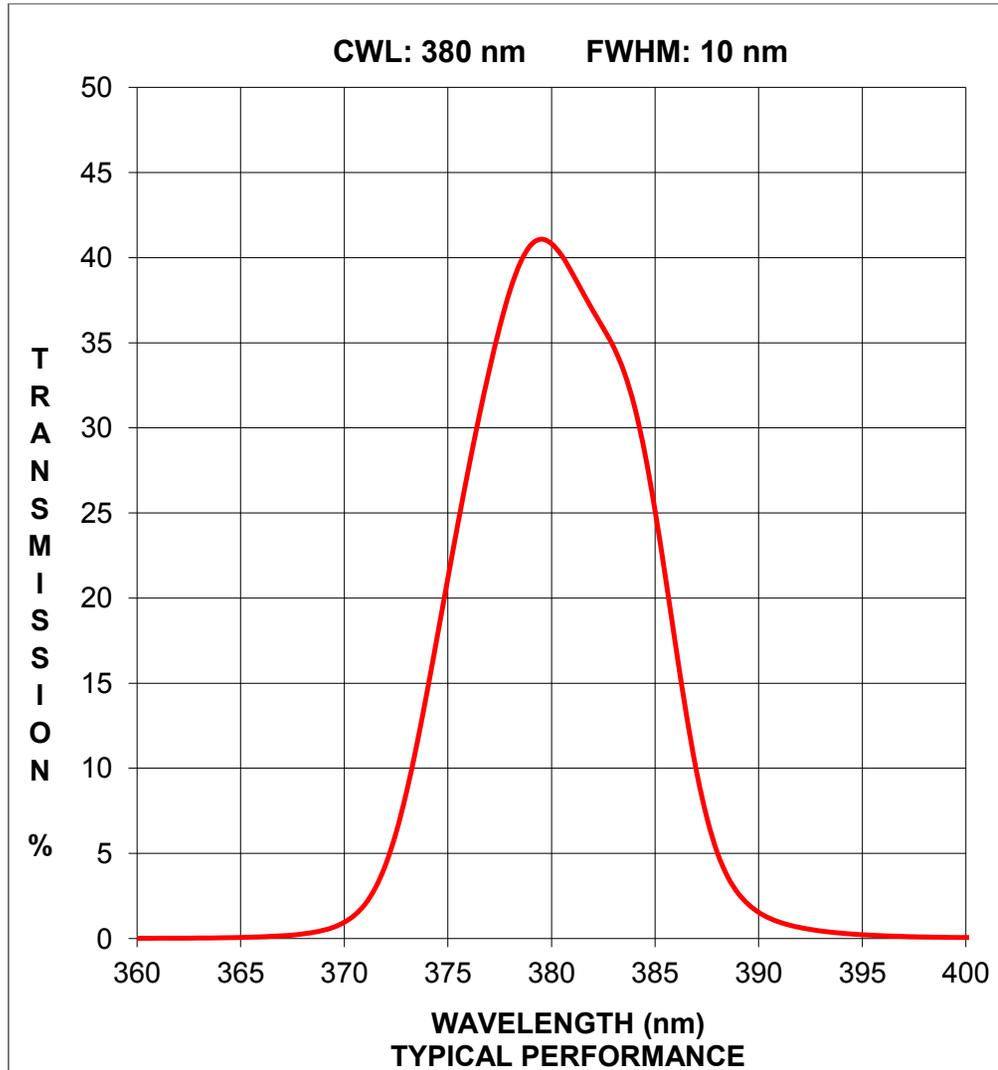

Ordering Information

| Size | 12.5 mm +0.0/-0.2 mm | 25.0 mm +0.0/-0.1 mm |
|------------------------|-------------------------|-------------------------|
| Part Number | F-380-10-12.5 | F-380-10-25 |
| Price | \$109.00 | \$164.00 |
| Minimum Clear Aperture | 9.0 mm | 21.0 mm |
| Thickness | 7.5 mm +0.0/-0.2 mm | |

Standard Specifications

| | |
|----------------------------|--|
| Center Wavelength | 380 nm +/- 2 nm |
| FWHM (50% Bandwidth) | 10 nm +/- 2 nm |
| Blocking Density (average) | OD 4 |
| Blocking Range | X-Ray to IR |
| Minimum Peak Transmission | 25% |
| Angle of Incidence | 0 Degrees |
| Specification Temp. | 23° C |
| Survival Temp. Range | -50° C to +50° C (CWL's ≤400 nm) -50° C to +70° C (CWL's >400 nm) |
| Optical Quality | Commercial |
| Ring Material | Aluminum, Black Anodized |
| Ring Marking | CWL, FWHM, Light Direction |
| Humidity Resistance | MIL-810-810E, Method 507.3, 5 Cycles |

Custom Sizes Available Upon Request

All Specifications Subject To Change Without Notice

